


UTP Category 5E Cables

Content of Data Sheet		
Product model	CAB-LC2110B-E-IN	
Product specification	Cat5e. U/UTP. 4x2x0.45mm Outdoor	
Test Standard	ISO/IEC11801 、 TIA-568-C.2	
Conductor	Material	OFC
	AWG	25
	Nom.O.D.(mm)	0.45±0.005 mm
Insulation	Material	PVC
	Diameter	0.82±0.05 mm
	Color	Blue/White- Blue
		Green/White-Green
	Color	Orange /White-Orange
		Brown/White-Brown
Pitch	Offset pitch	≤20 mm
Sheath	Material (IN Jacket)	PVC
	Material (OUT Jacket)	PE
	External O.D.	6±0.2 mm
	Color(OUT Jacket)	Black
	Tensile strength	>13.5 Mpa
	Thickness (IN Jacket)	0.6±0.05 mm
	Thickness (OUT Jacket)	0.45±0.05 mm
Surface Printing	Letter height	3.0±0.3 mm
	Color	Black
	Print error & Space	1±0.005 m
	Case number	Yes
Packing	Packing	Carton
	Once packing dimension	320mm*264mm*336mm
	Twice packing dimension	550mm*335mm*360mm

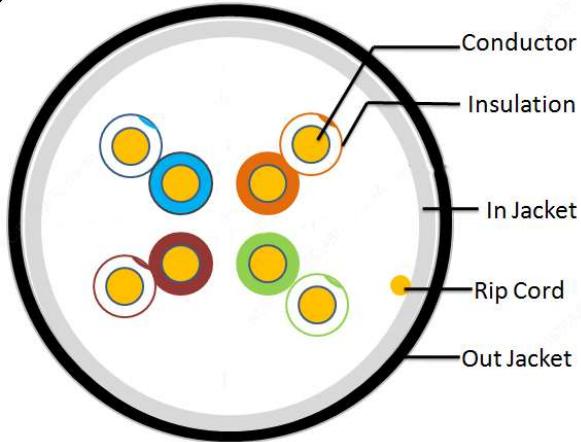

	Twice packing quantity	2 cases
Packing length	305±1 m	
Rip-cord	Yes	
Ambient temperature	-20°C ~ 60°C	

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.